




POLYPROPYLENE FLAT 205°F 5KV PUMP CABLE

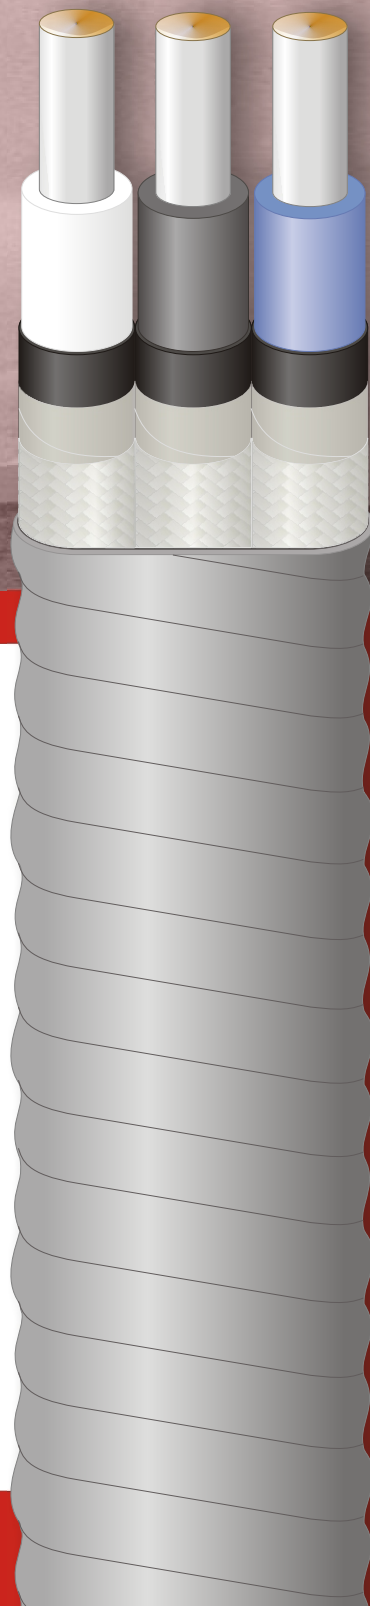

POLYPROPYLENE
INSULATION

TINNED COPPER
SOLID CONDUCTOR

NITRILIC JACKET,
TEFLON TAPE AND
NYLON BRAID

INTERLOCKED
STEEL TAPE ARMOR,
FULLY GALVANIZED

GAUGE (AWG)	MAXIMUM CONDUCTOR Ø (In)	INSULATION THICKNESS (mils)	MAXIMUM EXT. DIM. (In)
3x4	0.210	90	0.75x1.90

CONSTRUCTION

WWW.WIREX.COM.BR