




POLYPROPYLENE 205°F 5KV PUMP CABLE

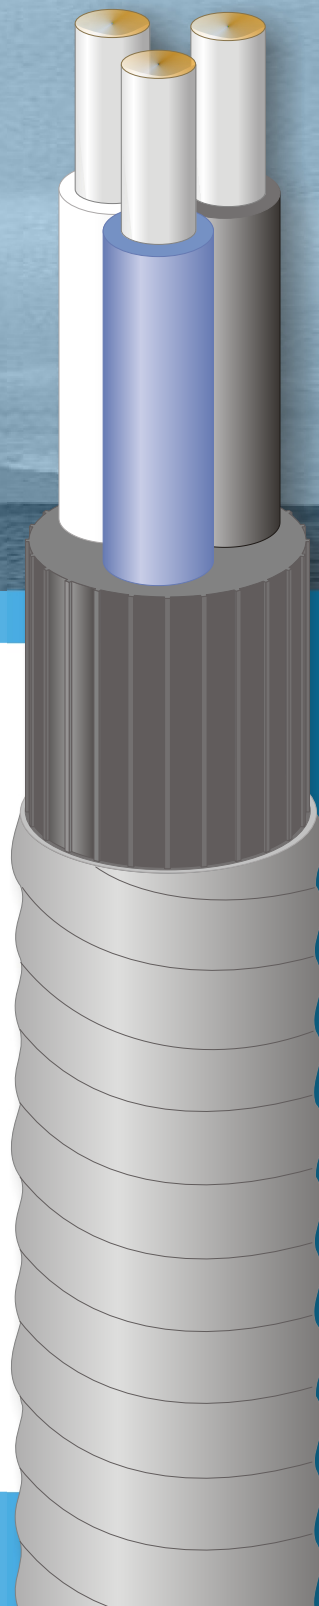

POLYPROPYLENE
INSULATION

FILLER

INTERLOCKED
STEEL TAPE ARMOR,
FULLY GALVANIZED

TINNED COPPER
CONDUCTOR,
SOLID (#6, #4)
OR CLASS B (#2)

NITRILIC RUBBER
INNER JACKET

GAUGE (AWG)	MAXIMUM CONDUCTOR Ø (In)	INSULATION THICKNESS (mils)	MAXIMUM OVERALL Ø (In)
3x6	0.165	90	1.10
3x4	0.210	90	1.20
3x2	0.270	90	1.35

CONSTRUCTION

WWW.WIREX.COM.BR